
RAIL CLAMP PLUS SET INSTALLATION


Connects Benno[®] Rails PLUS to Boost E Rear Racks PLUS

READ CAREFULLY BEFORE INSTALLATION AND USAGE. TO BE INSTALLED BY MECHANIC AT AUTHORIZED BENNO DEALER.

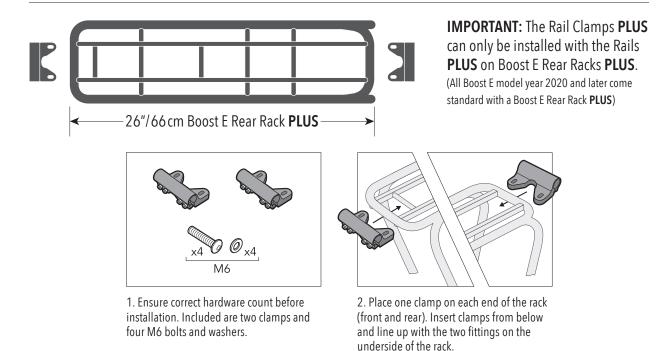


M6 M6

3. Insert the two M6 bolts through the slotted holes of the clamp and screw into the fittings on the underside of the rack. HAND-TIGHTEN BOLTS SLIGHTLY – CLAMPS STILL NEED TO BE ABLE TO MOVE.



4. Insert rails all the way to the center of the clamps until they come to a stop. Loosen clamp bolts as needed for easy insertion. Install entire rail before tightening. (To see more specific rail installation instructions refer to the Rail PLUS installation manuals).



5. When all pieces are installed, adjust and straighten clamps and rails if needed. **IMPORTANT: NOW TIGHTEN ALL HARDWARE FIRMLY** (see Nm above). After installation, please check for secure fit and that everything works correctly.

IMPORTANT: Notes to mechanic: See diagram. Install Benno Rail Clamps PLUS and Rails PLUS only on compatible Benno Boost E Rear Racks PLUS and use only pre-drilled holes and fittings. M5 bolts are to be tightened to 5Nm and M6 bolts to 6Nm. Do not mount clamps and rails to damaged racks. Use only original Benno Rails PLUS with the Benno Rail Clamps PLUS. Do not modify clamps, racks or rails, change position or drill new holes as this will void any warranties and/or claims for liability.

Notes to owner: Periodically check to make sure the nuts and bolts remain tight as vibrations may loosen them. Always make sure no parts of the body or clothing come near moving parts on the bicycle such as chain, spokes, tires or brakes.

WARNING: BENNO RAILS MAY HELP STABILIZE LOAD DURING NORMAL OPERATION BUT DO NOT PROTECT IN THE EVENT OF AN ACCIDENT OR BIKE FALLING OVER. RAILS DO NOT INCREASE MAX LOAD INDICATED ON RACK. DO NOT SIT OR STAND ON RAILS.

